
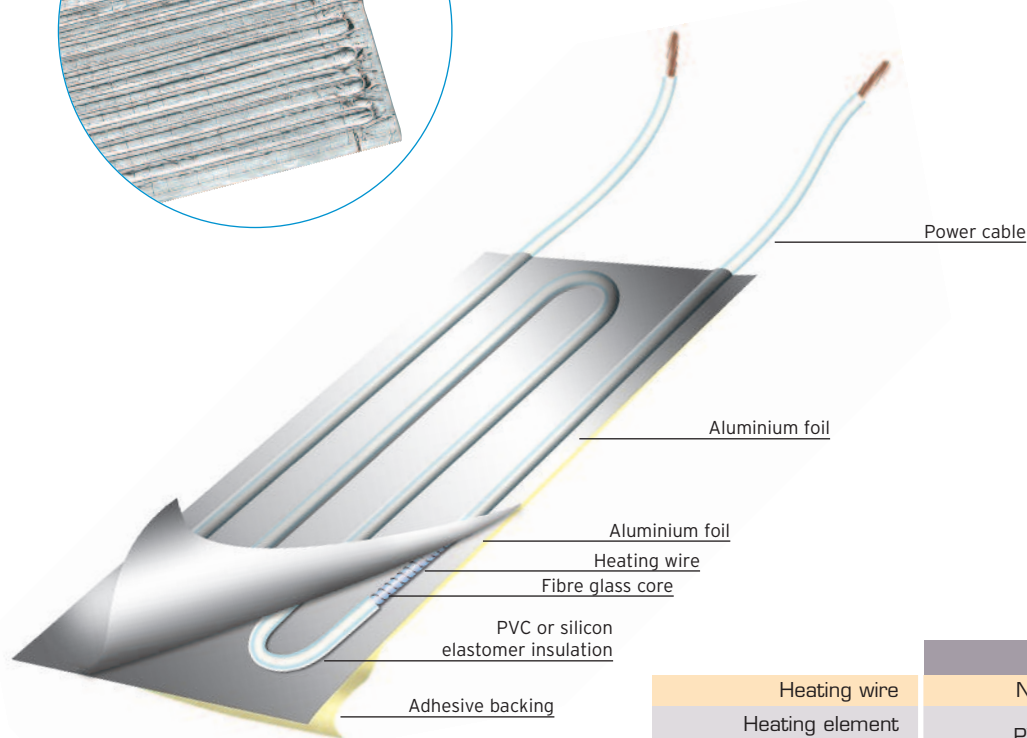
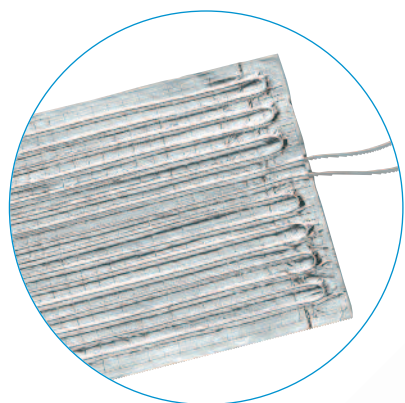


## A Aluminium Heater Mats

### Characteristics

- Takes up little space.
- Highly flexible.
- Rectangular shapes.
- Quick and easy to fit.
- Any voltage on request.
-  mats on request.
- Length of power cable: 1 m as standard.



### Applications

Aluminium heater mats are used in many cases where large surfaces are to be heated and the power required is relatively low, for protecting against freezing or maintaining at temperatures up to + 80°C.

To ensure that these heating elements enjoy a long service life, we recommend using a control device.



### Notes:

#### Options

- Class II insulation.
- Temperature limit device.
- Cut-outs
- Aluminium foil can be earthed.

### Use

Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.

	Aluminium plates
Heating wire	Nickel-Copper or Nickel-Chrome
Heating element insulation	PVC 105°C or silicon elastomer
Standard widths	50, 100, 150, 200 and 400 mm
Thickness	~ 3 mm (thicker at connection point)
Max.power	0.25 W/cm <sup>2</sup>
Permissible surface temperature	from - 60°C to + 110°C
Max. maintenance temperature	+ 80°C
Tolerance	Power ± 10%

#### FLEXELEC S.A.S

10, rue des frères Lumière  
 Z.A. du Bois Rond  
 69720 ST BONNET DE MURE - FRANCE  
 Tel: + 33 (0)4.72.48.30.90  
 Fax: + 33 (0)4.78.40.82.61  
 E-mail: flexelec@omerin.com

#### FLEXELEC Dept

OMERIN ASIA Pte Ltd  
 51 Goldhill Plaza #08-12/01  
 SINGAPORE 308900  
 Tel: + 65.6255.4778  
 Fax: + 65.6255.4779  
 E-mail: sales@omerin.com.sg

#### FLEXELEC (UK) Ltd

Unit 11 Kings Park Industrial Estate  
 Primrose Hill - KINGS LANGLEY  
 Hertfordshire - WD4 8ST - UK  
 Tel: + 44 (0) 1923.274477  
 Fax: + 44 (0) 1923.270264  
 E-mail: sales@omerin.co.uk

#### FLEXELEC Dept

OMERIN GmbH  
 Buchwiese 16  
 D-65510 IDSTEIN - GERMANY  
 Tel: + 49 (0) 6126.94.31-0  
 Fax: + 49 (0) 6126.83.99  
 E-mail: omeringmbh@omerin.com