



A Aluminium heater mats

Characteristics

- Takes up little space.
- Highly flexible.
- Rectangular shapes.
- Quick and easy to fit.
- Any voltage on request.
- mats on request.
- Length of power cable : 1 m as standard.
- Special production on request.
- Ingress protection code : IP54

Applications


Aluminium heater mats are used in many cases where large surfaces are to be heated and the power required is relatively low, for protecting against freezing or maintaining at temperatures up to + 80°C.

To ensure that these heating elements enjoy a long service life, we recommend using a control device.



Notes :

- Options
- CLASS II insulation
 - Temperatur limit device.
 - Cut-outs.
 - Aluminium foil can be earthed.

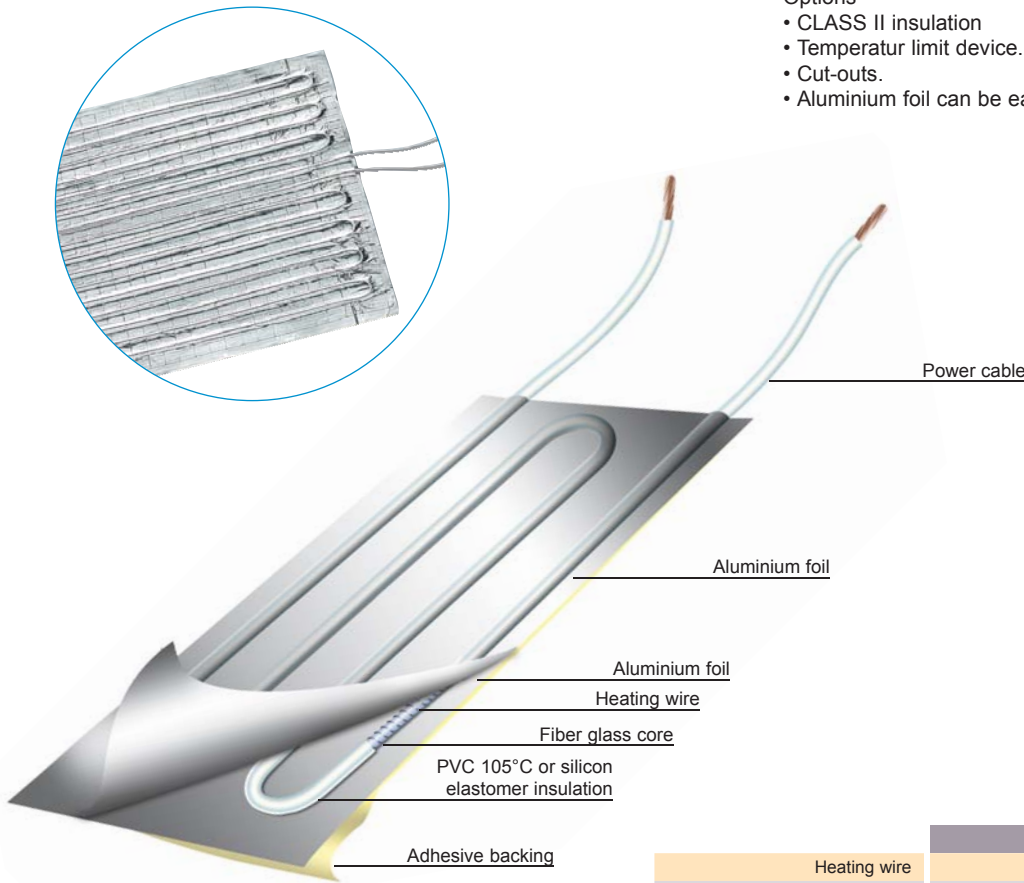

	Aluminium plates
Heating wire	Nickel-Copper or Nickel-Chrome
Max.surface	1.5 m ²
Max.length	3 m
Max. width	1 m
Thickness	~ 3 mm (thicker at connection point)
Max. power	0.25 W/cm ²
Permissible surface temperature	from - 60°C to + 110°C
Max. maintenance temperature	+ 80°C
Tolerance	Power ± 10%

Use

Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.

FLEXELEC S.A.S

10, rue des frères Lumière
Z.A. du Bois Rond
69720 ST BONNET DE MURE - FRANCE
Tél : + 33 (0)4.72.48.30.90

E-mail : flexelec@omerin.com

FLEXELEC Dept

OMERIN ASIA Pte Ltd
51 Goldhill Plaza #08-11
SINGAPORE 308900
Tel : + 65 6255.4778
Fax : + 65 6255.4779
E-mail : sales@omerin.com.sg

FLEXELEC (UK) Ltd

Unit 11 Kings Park Industrial Estate
Primrose Hill - KINGS LANGLEY
Hertfordshire - WD4 8ST - UK
Tel : + 44 (0) 1923 274477
Fax : + 44 (0) 1923 270264
E-mail : sales@omerin.co.uk

FLEXELEC Dept

OMERIN GmbH
Buchwiese 16
D-65510 IDSTEIN - GERMANY
Tel : + 49 (0) 6126.94.31-0
Fax : + 49 (0) 6126.83.999
E-mail : omeringmbh@omerin.com