

### FTS3/IS High power constant power cables



#### Characteristics

- Welded contact points.
- Can be cut to length on site.
- Extremely simple termination.
- Cold tail incorporated: no extra connection necessary.
- Available as 100 W/m.
- Power supply: 230 V.
- Tinned copper braid and silicon elastomer outer sheath .

#### Applications


FTS3/IS cables are designed for protecting railway lines, points and power rails from freezing or for keeping them clear of snow.

To ensure that these heating elements enjoy a long service life, we recommend using a control device.



#### Fitting:

As a fitting accessory, we offer a U-shaped composite profile to cover the cable. Section 10 x 24 mm - 3 m long.

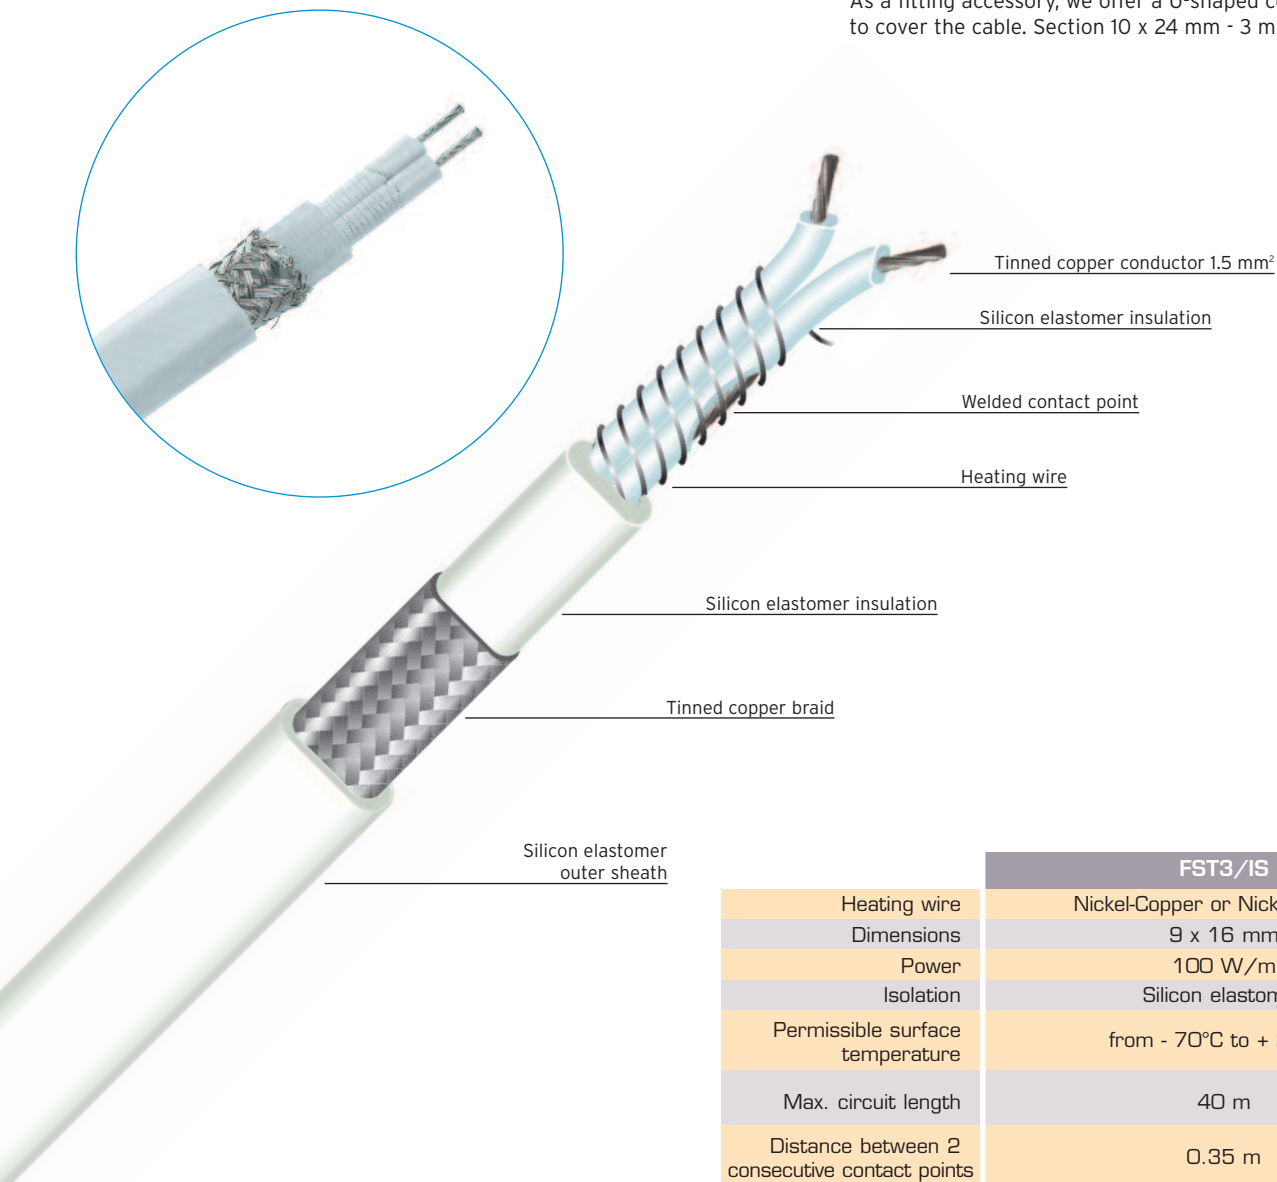

	FTS3/IS
Heating wire	Nickel-Copper or Nickel-Chrome
Dimensions	9 x 16 mm
Power	100 W/m
Isolation	Silicon elastomer
Permissible surface temperature	from - 70°C to + 200°C
Max. circuit length	40 m
Distance between 2 consecutive contact points	0.35 m

#### Use

Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.

#### FLEXELEC S.A.S

10, rue des frères Lumière  
Z.A. du Bois Rond  
69720 ST BONNET DE MURE - FRANCE  
Tel: + 33 (0)4.72.48.30.90  
Fax: + 33 (0)4.78.40.82.61  
E-mail: flexelec@omerin.com

#### FLEXELEC Dept

OMERIN ASIA Pte Ltd  
51 Goldhill Plaza #08-12/01  
SINGAPORE 308900  
Tel: + 65.6255.4778  
Fax: + 65.6255.4779  
E-mail: sales@omerin.com.sg

#### FLEXELEC (UK) Ltd

Unit 11 Kings Park Industrial Estate  
Primrose Hill - KINGS LANGLEY  
Hertfordshire - WD4 8ST - UK  
Tel: + 44 (0) 1923.274477  
Fax: + 44 (0) 1923.270264  
E-mail: sales@omerin.co.uk

#### FLEXELEC Dept

OMERIN GmbH  
Buchwiese 16  
D-65510 IDSTEIN - GERMANY  
Tel: + 49 (0) 6126.94.31-0  
Fax: + 49 (0) 6126.83.99  
E-mail: omeringmbh@omerin.com