

TEMPERATURE MAINTENANCE SYSTEMS

FTTH - FTTH/T - FTTH/I - FTTH/TF - FTTH/IS

Fluoropolymer insulated constant power cables



Characteristics

- Welded contact points.
- Hard-wearing and flexible.
- Can be cut to length on site.
- Extremely simple termination.
- Cold tail incorporated: no extra connection necessary.
- Available as 20, 30, 40 or 50 W/m.
- Power supply 230 V as standard (400 V on request).
- FTTH : fluoropolymer insulated constant power cables.
- FTTH/T : with tinned copper braid for mechanical protection and earthing.
- FTTH/I : with stainless steel braid for mechanical protection and earthing.
- FTTH/TF : with tinned copper braid and fluoropolymer anti-corrosion outer sheath.
- FTTH/IS : with stainless steel braid and silicon elastomer outer sheath.
- Special production on request.

Applications

The FTTH range is particularly suitable for maintaining temperatures up to + 150°C.

Their fluoropolymer insulation endows them with the ability to withstand corrosive substances, making FTTH cables particularly well-suited for use in the chemical industry.


To ensure that these heating elements enjoy a long service life, we recommend using a control device.



Standards

CEI 62395-1
CEI 62395-2

Power	Distance between 2 consecutive contact points	Max. circuit length	Max. maintenance temperature
20 W/m	0.7 m	140 m	150°C
30 W/m	0.7 m	120 m	140°C
40 W/m	0.6 m	100 m	120°C
50 W/m	0.6 m	90 m	90°C

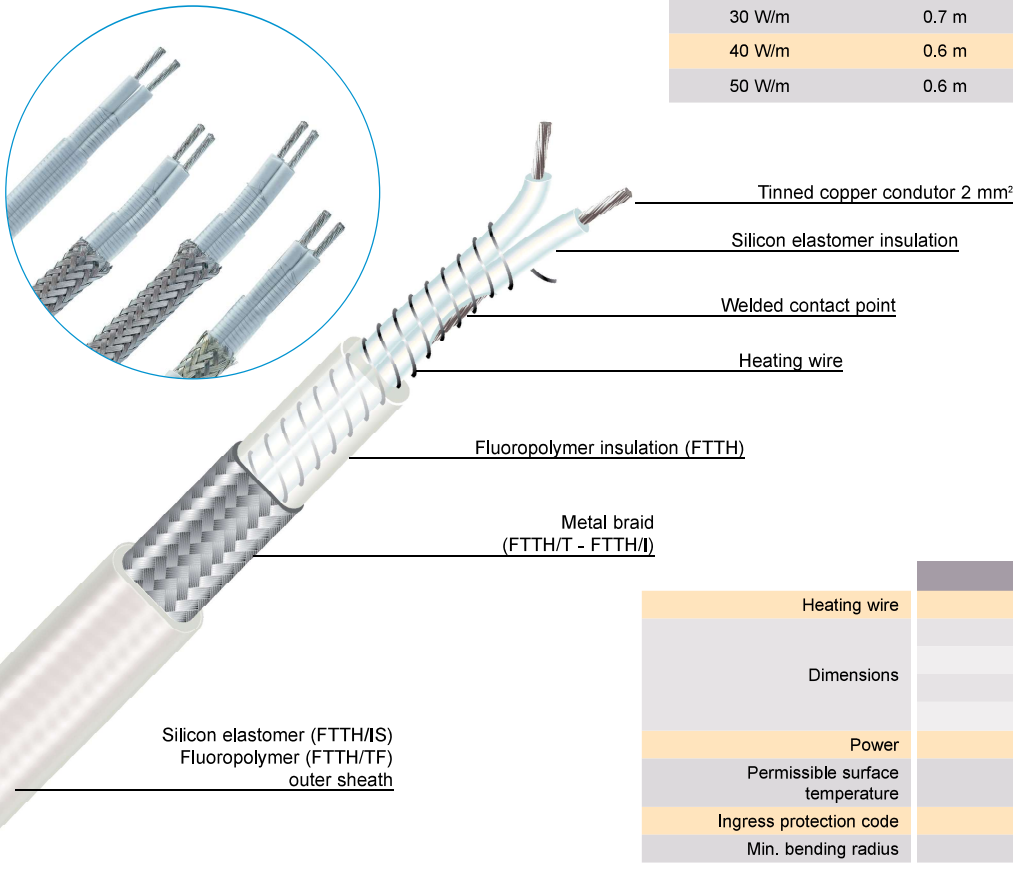

	FTTH
Heating wire	Nickel-Copper or Nickel-Chrome
Dimensions	FTTH : 5 x 8 mm
	FTTH/T - FTTH/I : 5,5 x 8,5 mm
	FTTH/TF : 6 x 9 mm
	FTTH/IS : 7 x 10 mm
Power	20, 30, 40 or 50 W/m
Permissible surface temperature	from - 70°C to + 200°C
Ingress protection code	IP54 with our kits
Min. bending radius	6 x the thickness of cable

Use

Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.

FLEXELEC S.A.S
10, rue des frères Lumière
Z.A. du Bois Rond
69720 ST BONNET DE MURE - FRANCE
Tél : + 33 (0)4.72.48.30.90
E-mail : flexelec@omerin.com

FLEXELEC Dept
OMERIN ASIA Pte Ltd
51 Goldhill Plaza #08-11
SINGAPORE 308900
Tel : + 65.6255.4778
Fax : + 65.6255.4779
E-mail : sales@omerin.com.sg

FLEXELEC (UK) Ltd
Unit 11 Kings Park Industrial Estate
Primrose Hill - KINGS LANGLEY
Hertfordshire - WD4 8ST - UK
Tel : + 44 (0) 1923.274477
Fax : + 44 (0) 1923.270264
E-mail : sales@omerin.co.uk

FLEXELEC Dept
OMERIN GmbH
Buchwiese 16
D-65510 IDSTEIN - GERMANY
Tel : + 49 (0) 6126.94.31-0
Fax : + 49 (0) 6126.83.999
E-mail : omeringmbh@omerin.com