

KYX Series cables for road heating



Characteristics

- Hard-wearing and flexible.
- Mechanical protection and earthing.
- Will withstand at the temperature at which asphalt is laid.
- Series resistance: 0.058 at 1 Ω /m.
- Silicon elastomer insulation, with copper braided shielding and an outer XLPE cross linked polyethylene sheath.
- Special production on request.
- Ingress protection code : IP67 terminated cable by ourself - IK09.

Applications

KYX cables are used for heating floors, roads or access ramps.

They are specially designed to be laid between 2 layers of road surface.

Cables must be set in roads in accordance with local regulations.



To ensure that these heating elements enjoy a long service life, we recommend using a control device



Standards

CEI 62395-1
CEI 62395-2

NF P 52-302-1 + annex A1
NF P 52-302-2 (DTU 65.7)

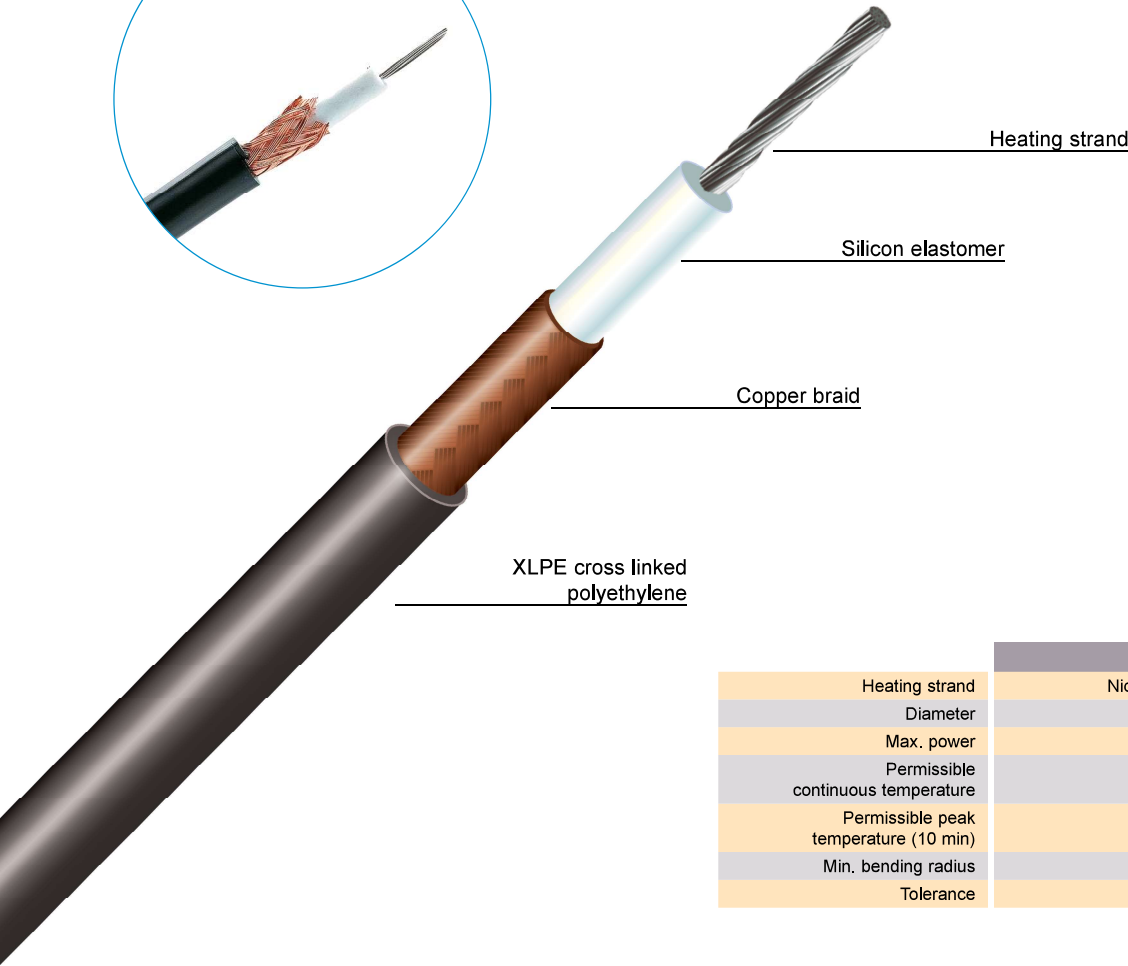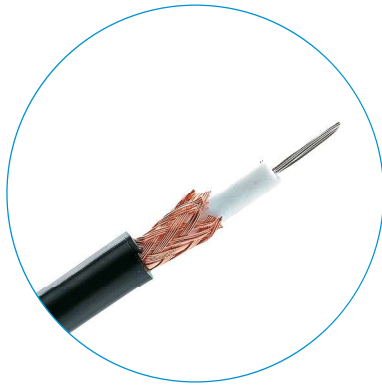

Heating strand

Silicon elastomer

Copper braid

XLPE cross linked polyethylene

	KYX
Heating strand	Nickel-Copper or Nickel-Chrome
Diameter	7 mm
Max. power	30 W/m
Permissible continuous temperature	up to + 90°C
Permissible peak temperature (10 min)	up to + 250°C
Min. bending radius	6 x the diameter
Tolerance	Resistance - 5% + 10%

Use

Consult the pages of the catalogue devoted to the corresponding general operating principles, general instructions for use and accessories.

FLEXELEC S.A.S

10, rue des frères Lumière
Z.A. du Bois Rond
69720 ST BONNET DE MURE - FRANCE
Tél : + 33 (0)4.72.48.30.90

E-mail : flexelec@omerin.com

FLEXELEC Dept

OMERIN ASIA Pte Ltd
51 Goldhill Plaza #08-11
SINGAPORE 308900
Tel : + 65.6255.4778
Fax : + 65.6255.4779
E-mail : sales@omerin.com.sg

FLEXELEC (UK) Ltd

Unit 11 Kings Park Industrial Estate
Primrose Hill - KINGS LANGLEY
Hertfordshire - WD4 8ST - UK
Tel : + 44 (0) 1923.274477
Fax : + 44 (0) 1923.270264
E-mail : sales@omerin.co.uk

FLEXELEC Dept

OMERIN GmbH
Buchwiese 16
D-65510 IDSTEIN - GERMANY
Tel : + 49 (0) 6126.94.31-0
Fax : + 49 (0) 6126.83.999
E-mail : omeringmbh@omerin.com